



713-984-9441

Copyright© 2004 David Lott, Diesel Innovations, <http://www.dieselinnovations.com>

Documentation Version 1.0 300905

## **7.3 Ford PowerStroke Head Stud Installation Guide**

**Retail Price - \$699.00**

### **REMEMBER – THIS IS A PERFORMANCE PRODUCT – USE AT YOUR OWN RISK**

Do not use this product until you have carefully read the following agreement.

This product may affect the ability of your dealer to diagnose any problem on your vehicle so it must be removed before taking it to your dealer.

This agreement sets forth the terms and conditions for the use of this product. The installation of this product indicates that the buyer has read and understands this agreement and accepts the terms and conditions.

### **DISCLAIMER OF LIABILITY**

Diesel Innovations, its distributors, jobbers, and dealers (hereafter Seller) shall be in no way responsible for the product's proper use and service. **THE BUYER HERBY WAIVES ALL LIABILITY CLAIMS.**

The Buyer acknowledges that he is not relying on the Sellers skill or judgment to select or furnish goods suitable for any particular purpose and that there are no liabilities which extend beyond the description on the face hereof, and the Buyers hereby waives all remedies or liabilities expressed or implied, arising by law or otherwise, (including without any obligation of the Seller with respect fitness, merchantability and consequential damages) or whether or not occasioned by the Seller's negligence.

The Seller disclaims any warranty and expressly disclaims any liability for personal injury or damages. The Buyer acknowledges and agrees that the disclaimer of any liability for personal injury is a material term for this agreement and the Buyer agrees to indemnify the Seller and to hold the seller harmless from any claim related to the item of the equipment purchased. Under not circumstances will the Seller be liable for any damages or expenses by reason of use or sale of any such equipment.

The Seller assumes no liability regarding the improper installation or misapplication of its products. It is the installer's responsibility to check for proper installation and if in doubt contact the manufacturer.

The Buyer is solely responsible for all warranty issues from the manufacturer.

### **LIMITATION OF WARRANTY**

Diesel Innovations, (Hereafter "Seller") gives Limited Warranty as to description, quality, merchantability, and fitness for any particular purpose, productiveness, or any other matter of Seller's product sold herewith. The Seller shall be in no way responsible for the products proper use and service and the Buyer hereby waives all rights other than those expressly written herein. This warranty shall not be extended, altered or varied except be a written instrument signed by Seller and Buyer.

The Warranty is Limited to one (1) year from the date of sale and limited solely to the parts contained within the products kit. All products that are in question of Warranty must be returned prepaid to the Seller and must be accompanied by a dated proof of purchase receipt. All Warranty claims are subject to approval by Diesel Innovations.



Under no circumstances will the Seller be liable for any labor charged or travel time incurred in diagnosis for defects, removal, or reinstallation of this product or any other contingent expenses.

Under no circumstances will the Seller be liable for any damage or expenses incurred by reason of the use or sale of any such equipment.

IN THE EVENT THAT THE BUYER DOES NOT AGREE WITH THIS AGREEMENT: THE BUYER MAY PROMPTLY RETURN THIS PRODUCT, IN A NEW AND UNUSED CONDITION, WITH A DATED PROOF OF PURCHASE TO THE PLACE OF PURCHASE WITHIN TEN (10) DAYS FROM DATE OF PURCHASE FOR A FULL REFUND.

THE INSTALLATION OF THIS PRODUCT INDICATES THAT THE BUYER HAS READ AND UNDERSTANDS THIS AGREEMENT AND ACCEPTS ITS TERMS AND CONDITIONS.

1. Make sure that the head stud holes in the block are clean and free of debris, oil, and grease. Use degreaser and compressed air to clean.
2. Lubricate the head stud **FINE** threads, both sides of the washer, and on the bottom side of the nut with CMD #3 Extreme Pressure Lube, making sure that **ALL** of the **FINE** threads are covered.
3. Install head studs in block and tighten to 10 lb-ft of torque.
4. Install the washers bevel side down and then install the nuts hand tight.
5. Tighten the nuts in the following sequence in 3 stages:
  - Stage 1: Using the first sequence below, tighten the nuts to 65 lb-ft.
  - Stage 2: Using the first sequence below, tighten the nuts to 85 lb-ft.
  - Stage 3: Using the second sequence below, tighten the nuts to 95 lb-ft.
  - Stage 4: Using the second sequence below, tighten the nuts to 120 lb-ft.

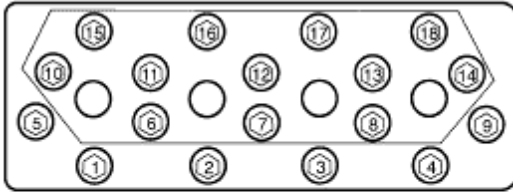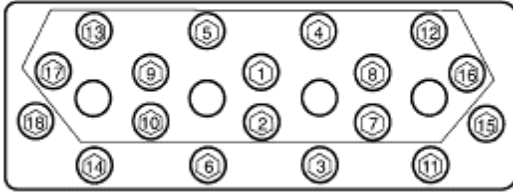

DA1861-B